

Verbatim LED Tube T8 G13 1500mm 28W 2600lm 6500K

- G13 Socket
- 220-240V
- 40,000 hours Lifetime
- Luminous Flux: 2600 lm

Product Number 52705**General Data**

Lamp Socket	G13
Design	LED T8 Tube

Electric Data

Wattage (W)	28
Voltage (V)	220-240
Dimmable	no
Power Factor	0.90
Operating Frequency (Hz)	50-60

Geometric Data

Length (mm)	1513
Diameter (mm)	28 x 32
Weight (g)	420

Photometric Data


Luminous Flux (lm)	2600
CRI	80
CCT (K)	6500
Beam Angle (°)	120
Luminous Efficacy (lm/W)	92.86
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-35 ÷ 45°C




Product image




Technical drawing



Application image

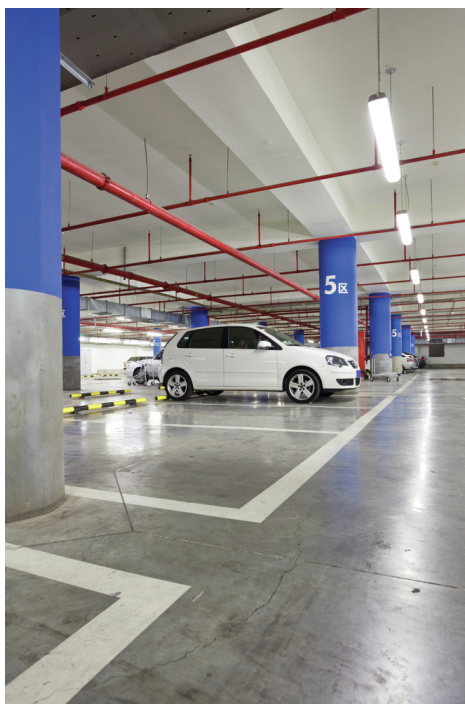

Energy Rating

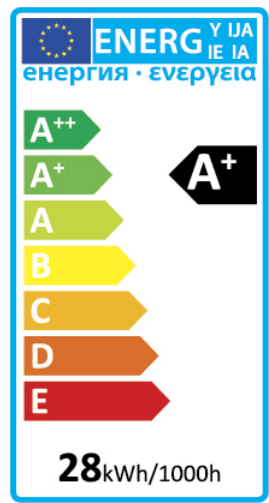


Technical Packaging Details

Barcode	023942527053
EAN 128	(02)00023942527053(37)04(91)803
EAN 14	50023940527058
Pack Dimensions(HxWxL)	35 x 33 x 1595 (mm)
Pack Weight	580 (g)
MOQ	10
Carton Dimensions (HxWxL)	90 x 180 x 1595 (mm)
Cartons/Pallet	36
Layers/Pallet	9
Units/Pallet	360



Photometric Diagrams

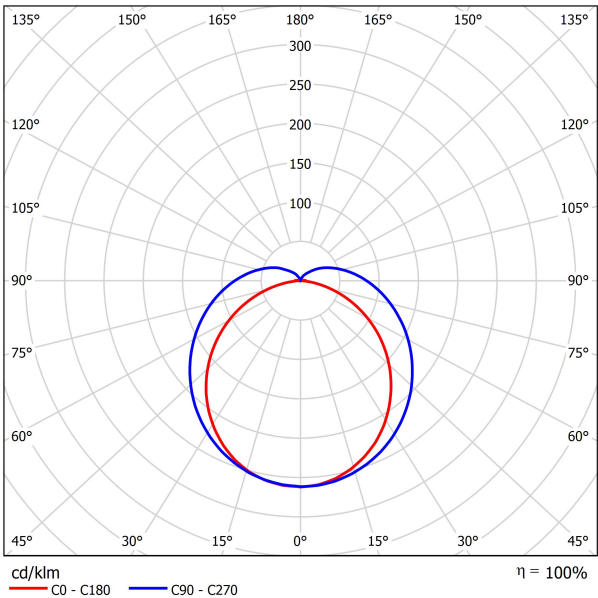

0.5	2.86 1.31	E(0°) E(C90) E(C0)	70.7° 52.7°	2710 49 302
1.0	5.71 2.63	E(0°) E(C90) E(C0)	70.7° 52.7°	678 12 76
1.5	8.57 3.94	E(0°) E(C90) E(C0)	70.7° 52.7°	301 5 34
2.0	11.42 5.25	E(0°) E(C90) E(C0)	70.7° 52.7°	169 3 19
2.5	14.28 6.56	E(0°) E(C90) E(C0)	70.7° 52.7°	108 2 12
3.0	17.13 7.88	E(0°) E(C90) E(C0)	70.7° 52.7°	75 1 8

Distance [m] Cone Diameter [m] Illuminance [lx]

— C0 - C180 (Half-value Angle: 105.4°)
— C90 - C270 (Half-value Angle: 141.4°)