



Verbatim LED Panel 40W 3000K 3800lm 1250x312.5

- Energy efficient alternative to Fluorescent Panels
- 50 000 hours lifetime (L70B50)
- Light output of 3800lm
- 3000K warm white light
- Flicker-free driver
- PC diffuser passing 850° glow wire test
- 5 Years Warranty


Product Number	52260
General Data	
Installation type	Recessed
Housing material	Aluminium / Polycarbonate diffuser
Housing colour	White
Protection class	IP20
Dimmable	no
Geometric Data	
Length (mm)	1245
Height (mm)	12.5
Width (mm)	307.5
Weight (g)	3500
Electric Data	
Wattage (W)	40
Voltage (V)	200 - 240
Current (mA)	190
Power Factor	>0.9
Operating Frequency (Hz)	50/60
Safety Class	Class III
Power supply	External (not included)
Photometric Data	
Luminous Flux (lm)	3800
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	95
Luminous Intensity (cd)	1580
UGR	>19
Lifespan	
Lifetime (hrs)	50,000 (L70B50)
Switching Cycle	100,000
Mechanical Parameters	
Glow wire test	850°C



Product image

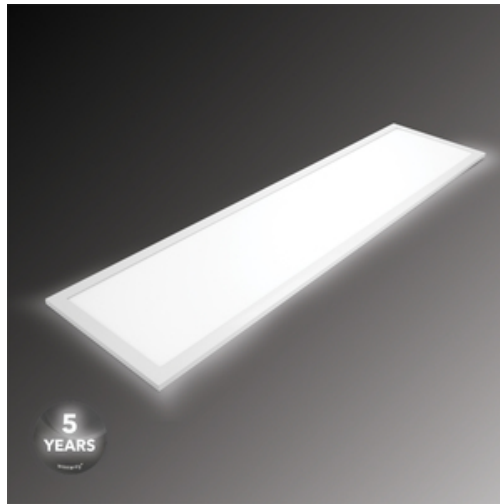


Technical drawing



Application image



Energy Rating

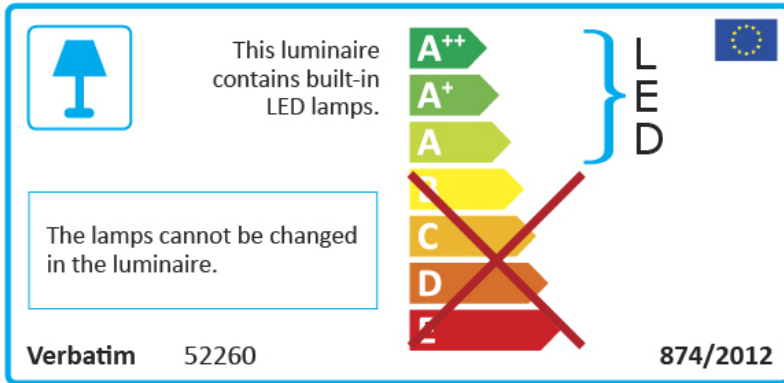

Technical Packaging Details

Barcode

023942522584

EAN 128

(02)0002394252607(37)04(91)823

EAN 14

50023942522602

Pack Dimensions(HxWxL)

40 x 365 x 1300 (mm)

Pack Weight

4000 (g)

MOQ

1

Carton Dimensions (HxWxL)

185 x 385 x 1320 (mm)

Cartons/Pallet

10

Layers/Pallet

5

Units/Pallet

40

